

TWMR-5002

EN50155 Multifunction VPN Router w/1 WiFi 11ac + 1 LTE 4G + 2 serial ports + 2 Gigabit X-coded Ethernet(incl.1 PD) for Load Balancing**, TWCC**, VPN, Protocol Gateway, Storage**; WV/24V input; IP65/54

- Built-in 1x WiFi 11ac/a/b/g/n module + 1xLTE 4G module + 2xGigabit X-coded ports(incl. 1PD)
- Up to 2 concurrent modem for 3G/4G LTE Link & GPS(1L-1AC model/2 SIMs)
- Optional TWCC**(Train Wireless Carriage Coupling))for auto wireless coupling
- Built-in 2 serial ports with 2.5K isolation(RS422/485) or w/o isolation(RS232)
- LTE 4G modem with GPS positioning & 2 SIMs fail-over
- WiFi radio for 802.11ac/a/b/g/n with 5GHz or 2. 4GHz; MIMO 3T3R
- Unlimited concurrent users
- Fast roaming<50ms**; 802.11r work with Lantech controller</p>
- Supports AP/ Bridge/ Client modes
- VPN router for Multi-site VPN, OpenVPN, L2TP, IPSec, PPTP**
- Load Balancing** support 8 mechanism for WiFi client/WAN arrangement
- Support NAT and Firewall
- Support Modbus or DNP3** gateway on serial ports
- Galvanic isolation on WV model from 16.8V~137.5V input; 24V model input from 9V~60V
 - Built-in environmental monitoring for router inside info with voltage, current, temperature; WiFi & LTE graphic signal strength & TX/RX rate display
- Editable login page of captive portal for hot-spot application
- USB port for backup, restore the configuration file and upgrade firmware*; Dual image firmware*
- Optional external USB to microSD** for configuration management, storage backup or multi-media content suit with load-balancing route
- IP 65 /54 Aluminum housing for best heat dissipation and preventing moist ingress
- EN50155/61373/45545 verification for railway application





OVERVIEW

Lantech TWMR-5002 series is a next generation EN50155 multi-function VPN router w/1x 802.3ac WiFi + 1x LTE modem + 2x Gigabit Ethernet(incl.1 PD)+ 2 serial ports that supports advanced function of VPN, Load-balancing**(Premium pack), Protocol gateway(Modbus,DNP3**), Storage**, WiFi roaming** and LTE dual SIM fail-over for on-board / onboard-to-ground applications. The dual core CPU with 1.6GHz + 256M flash enables the router to multi-task smoothly.

Optional TWCC** (Train Wireless Carriage Coupling) for auto coupling

TWMR-5002 series supports optional TWCC** (Train Wireless Carriage Coupling) that enables auto wireless coupling to reconnect APs.

LTE modem 4G/3G with dual SIM fail-over

Built-in one LTE modem with 2 SIM card slots, TWMR-5002 can

allow failover between two operators for resilient connection. Both GPS and Russian GLONASS systems are supported (may vary in models)

IEEE 802.11ac radio up to 1.3GMbps bandwidth

With IEEE 802.11ac capability, TWMR-5002 can operate either 5GHz or 2.4GHz bands, offering the maximum speed of 1.3GMbps bandwidth. It is also compatible with 802.11g/n that can work with 2.4GHz for longer range transmission.

The WiFi 11ac supports AP/BRIDGE/AP Client modes can be diverse for most of wireless application. Client mode supports PMK** Caching and pre-authentication. Working with load-balancing** "Priority" mode, the AP client can enable router to transmit on WiFi with first priority.

MIMO technology with 3T3R and SMA/QMA** type connectors

Lantech TWMR-5002 series adapts MIMO technology with Smart antenna transmission and reception for 3T3R.With six external detachable antenna connectors (SMA/QMA^{**}) and optional antennas, TWMR-5002 can have better Wi-Fi & LTE/GPS coverage. It can support unlimited concurrent users for WiFi hot-spot application.

Optional 802.11r fast roaming < 50ms**

TWMR-5002 support fast roaming < 50ms** (optional) in coordination with Lantech Wireless Controller to allow encryption keys to be stored on all of the APs in a network. Client mode supports PMK** Caching and pre-authentication.

Wireless WMM QoS

TWMR-5002 supports 802.11e standard which defines a set of Quality of Service for wireless LAN applications as well as WMM (WiFi multimedia)

Advanced security & 16 SSIDs

The security support standards including 64/128bits WEP, WPA/WPA2 PSK (TKIP*, AES), 802.1x** ensures the best security and active defense against security treads. Lantech TWMR-5002 support up to 16 SSIDs, each SSID has its independent security and encryption.

Load Balancing** with 8 mechanism for multi-WANs (premium license)

TWMR-5002 supports Load Balancing** for LTE / WAN connections. There are eight schemes for Load Balancing** function:

Pack	Algorithm	Description		
Standard	Fixed	Manually route by traffic type through fixed WAN link.		
Basic Package	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not failback until link loss.		
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. WiFi client>LTE>others		
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.		
	Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.		
Full Package (incl. basic package)	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.		
	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the		



	capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
Fastest*	Routes connections through the WAN link with lowest latency time.

2 port serial connection, Modbus / DNP3** gateway

It builds in 2 port serial connection for RS232 or RS422, RS485 in which RS422/485 has 2.5KV isolation protection.

The built-in Modbus gateway can convert Modbus RTU/ASCII to Modbus TCP for device control.

It also can support optional DNP3** gateway over serial ports

VPN and firewall

Besides traditional VPN peer to peer tunneling, TWMR-5002 support latest Multi-Site VPN function that is an efficient way for mesh tunneling. The registration is under cloud service and encrypted by SSH makes the connection easy and safe.

It supports Multi-Site VPN, Open VPN, L2TP, IPsec and PPTP** for various VPN applications.

The built-in Layer-4 firewall includes DoS^{**} , IP address filter / Mac address filter* / TCP/UDP port number.

DIDO for alarm & email** notice; Event log; Remote Web/SMS** control

2 sets of DIDO function can support additional high/low physical contact for designate applications besides Port / Power events, for example, DIDO function can trigger alarm if the router was moved or stolen. In case of events, the TWMR-5002 will immediately send email** and trap.

When the router is at remote area with limited access, Web/SMS** control can help to get router status or remotely reboot by Web/SMS**

Wide range dual isolated input voltage from 9V-60VDC (24V model) or 16.8-137.5V (WV model)

The TWMR-5002 is able to work from dual 9VDC to 60VDC input voltage (24V model) or $16.8V \sim 137.5V$ DC isolated input (WV model) that is particular good for vehicle, rail train, depot etc applications.

Environmental monitoring for inside router info& alerting; WiFi & LTE signal strength and TX/RX rate display

The built-in environmental monitoring can detect router overall temperature, voltage, current where can send the syslog, email** and SMS** alert when abnormal. The graphic WiFi & LTE signal strength and TX/RX rate display shows connection status at a glance.

Cloud/Host based InstaView**/InstaAir** software for router/fleet management and monitoring

Lantech InstaView^{**} can offer fixed location router central management, configuration, and monitoring via secured Cloud or Host server. InstaAir^{**} can offer fleet router management including the GPS tracking, signal strength, remote configure/upgrade, monitoring/alerting and report function

Lantech Pioneering Industrial and IP Networks

USB port for back up, restore configuration and upgrade firmware*; Dual image firmware*

The built-in USB port can upload/download the configuration through USB dongle for router replacement

It supports dual-image firmware* to choose which one to start.

Optional external USB to microSD** for storage backup or multimedia resources

The optional external USB to microSD** can have configuration management, data backup or pre-store the multimedia resources for content application. User can designate the route via load-balancing scheme to upload/download the data per request.

Editable login page of captive portal

The TWMR-5002 supports editable captive portal function that allows administrator to force end-users redirect to authentication page.

Ruggedized EN50155 design and FCC/CE, E-marking** certificate

The TWMR-5002 series is verified with EN50155, IEC61373, EN45545 standard with IP65/54 housing. It passed serious tests under extensive Industrial EMI and environmental vibration and shocks standards. With CE & FCC radio certification for WiFi and LTE and E-marking** certificate, the TWMR-5002 is best for outdoor community, vehicle, power substation, process control automation etc. For more usage flexibilities, TWMR-5002 supports operating temperature from -20°C to 70°C or-40°C to 70°C(-E).

FEATURES & BENEFITS

- High Speed Air Connectivity: WLAN interface support up to 1.3GMbps link speed(1AC)
- Built-in two Gigabit ports X-coded incl. 1 PD; 1LAN+1WAN or 2LAN
- Optional TWCC** (Train Wireless Carriage Coupling) for auto wireless coupling
- Dual band 2.4G and 5GHz with 802.11ac/a/b/g/n
- Support 2.4Ghz operating within the following frequency bands:
 - 2.412~2.472 GHz
- Support 5Ghz operating within the following frequency bands:

5.180GHz~5.825GHz

- MIMO Smart antenna technology with 3T3R with 6 SMA/QMA** type connectors for WiFi & LTE, GPS
- Unlimited concurrent users for WiFi
- Output power < 24dBM</p>
- Transmit power adjustment
- VAP (virtual access point) support up to 16 SSIDs
- Operation modes : AP/ Bridge/ AP Client
- Traffic control for each SSID**
- Band preference for same SSID services on dual band**
- Rate selection to disable low data rate access**
- Highly Security Capability: WEP64/128bits/ WPA/ WPA-PSK (TKIP*,AES)/ WPA2/ WPA2-PSK (TKIP*,AES)
- HTTP/HTTPS/Telnet/SSH & Administration access
- Support IPv6** & IPv4 protocol
- Radius Authentication, EAP-MD5, EAP-TLS, EAP-TTLS, PEAP; SSID broadcast disable supported**
- Multiple channel bandwidths of 20MHz and 40MHz for 2.4G.
- Multiple channel bandwidths of 20MHz, 40MHz and 80MHz for 5G only.
- Wi-Fi Multimedia (WMM) and 802.11e traffic prioritization
- One LTE 4G/3G w/ 2 SIM slots design for mobile redundancy
- GPS/ GLONASS (built-in LTE module) connection

 Load Balancing** supports 8 mechanism between multiple WANs

Pack	Algorithm	Description		
Standard	Fixed	Manually route by traffic type through fixed WAN link.		
Basic Package	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not failback until link loss.		
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. WiFi client>LTE>others		
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.		
	Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.		
Full Package (incl. basic package)	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.		
	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic		
	Fastest*	Routes connections through the WAN link with lowest latency time.		

- Built-in 2 x serial ports(RS232/RS422/485)
- Serial port with 2.5KV isolation on RS422/485
- Supports 2DI / 2DO(Digital Input / Output)
- Support Multi-Site VPN for mesh tunneling as well as

Open VPN, L2TP, IPsec and PPTP** fro secured network connection

- The built-in Layer-4 firewall includes DoS**, IP address filter / Mac address filter* / TCP/UDP port number
- NAT/DMZ
- Built-in Modbus gateway converting Modbus RTU/ASCII to Modbus/TCP
- Optional DNP3** over Ethernet gateway on serial ports
- Event alerting by Syslog, SNMP Trap, Email**, SMS** text, Relay ; Permanent local log rotation / Maxi 1K records
- Remote Web/SMS** control to get status or re-boot by Web/SMS**
- Built-in RTC to keep track of time always
- Support SNTP to synchronize system clock
- Support LLDP discovery protocol
- Support DHCP Server and Client
- Built-in environmental monitoring for system input voltage, current and ambient temperature; Able to set alert when abnormal
- Graphic LTE & WiFi signal strength & TX/RX rate


display

- Firmware upgradeable through TFTP/FTP/HTTP
 - Configuration backup and restoration
 - Supports editable configuration file for system quick installation

antech

- USB port to upload/download configuration by USB dongle
- Insta View/AIR** for centralized configuration deployment, backup & upgrade
- Dual image firmware*
- Support editable captive portal login page
- Cloud/Host based InstaAIR** for fixed/fleet router management/configuration/monitoring
- Optional external USB to microSD** for configuration management, storage backup or multimedia resource
- IP 65/54 housing for water proof environment
- Wall-mount installation
- Operation temperature -20~70C or -40~70C(-E)

DIMENSIONS (unit=mm)

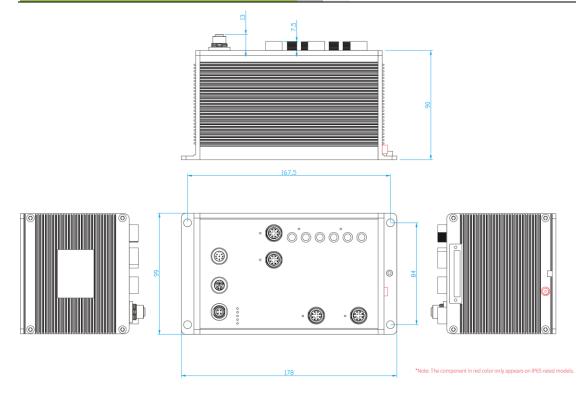

SPECIFICATION

WLAN Interface		Wireless bandwidth	5GHz: Up to 1300Mbps	
Operating Mode AP/BRIDGE/Client modes			2.4GHz: Up to 450Mbps	
Radio Frequency	Frequency DSSS, OFDM		802.11b: DSSS	
Туре			802.11a/g:	
Wireless Standard IEEE 802.11ac/n/a 5GHz			OFDM (BPSK, QPSK, 16-QAM, 64-QAM)	
The second and and	IEEE 802.11b/g/n 2.4GHz		802.11n:	
LLL 002.110/9/112.4012			OFDM (BPSK, QPSK, 16-QAM, 64-QAM)	

Datasheet Version 5.4



Operating	802.11ac:		
Onesetine			/B41)
	OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM) IEEE 802.11 a/b/g/n ISM Band,		WorldWide (WW model)
Frequency	2.412GHz~2.472GHz, 5150MHz~5850MHz		
Transmission Rate	IEEE802.11ac: up to 1300Mbps		2100/1900/1800/1700/850/2600/900/1800/700/700/8/ 50/850/800/850/700/2300/1500/2500/3500/3700/520
	IEEE802.11b: 1 / 2 / 5.5 / 11 Mbps		0/3600/1700
	IEEE802.11a/g: 6 / 9 / 12 / 18 / 24 / 36 / 48 / 54 Mbps		(B1/B2/B3/B4/B5/B7/B8/B9/B12/B13/B18/B19/B20/B
	IEEE802.11n: up to 450Mbps		26/B28/B29/B30/B32/B41/B42/B43/B46/B48/B66)
IEEE	Output Power Tx +/- 2dB(per chain)	Data Rates – LTE	APAC & Australia (APAC model)
802.11b/g/n(2.4Gbp s)	18dBm @ 1~11Mbps 18dBm @ 6~54Mbps		Downlink (Cat 6):
3)	20/20dBm @ MCS0~MCS7 (HT20/40)		FDD: 300 Mbps
	Receiver Sensitivity Rx +/- 2dB		TDD: 222 Mbps Uplink (Cat 6):
	≦-95dBm @ 1~11Mbps		FDD: 50 Mbps
	≦-92dBm @ 6~18Mbps		TDD: 26 Mbps
	≦-88dBm @ 24Mbps		
	≦-85dBm @ 36Mbps		Americas (US model) / EMEA (EU model) Downlink (Category 3):
	≦-81dBm @ 48Mbps ≦-80dBm @ 54Mbps		100 Mbps (20 MHz bandwidth)
	≦-94dBm @ MCS0 (HT20/40)		50 Mbps (10 MHz bandwidth)
	≦-76dBm @ MCS7 (HT20/40)		Uplink (Category 3): 50 Mbps (20 MHz bandwidth)
IEEE	Output Power Tx +/- 2dB(per chain)		25 Mbps (20 MHz bandwidth)
802.11b/g/n(2.4Gbp	18dBm @ 1~11Mbps	Software	
	18dBm @ 6~54Mbps	IPv6/4	Present
	20/20dBm @ MCS0~MCS7 (HT20/40)	Login Security	Supports IEEE802.1x** Authentication/RADIUS
	Receiver Sensitivity Rx +/- 2dB	TWCC**	Optional Train Wireless Carriage Coupling for Auto
	≦-95dBm @ 1~11Mbps ≦-92dBm @ 6~18Mbps	Access Scourity	wireless Coupling HTTP/HTTPS/Telnet/SSH & Administration:
	≦-88dBm @ 24Mbps	Access Security	SNMP*v1/v2/v3 access for authentication via
	≦-85dBm @ 36Mbps		MD5/SHA(v3) and Encryption via DES/AES(v3)
	≦-81dBm @ 48Mbps	Protocol	PPPoE Client, DHCP server/client, Adjustable MTU,
	≦-80dBm @ 54Mbps		Port forwarding (NAPT), DMZ; NAT, SNTP,
	≦-94dBm @ MCS0 (HT20/40)		Firewall(Firewall(DoS**; IP address filter / Mac address filter* / TCP/UDP port number), VRRP**,
	≦-76dBm @ MCS7 (HT20/40)		DDNS*
IEEE	Output Power Tx +/- 2dB(per chain)	Management	SNMP*v1,v2c,v3/Web/Telnet/CLI
802.11a/n/ac(5Gbp s)	20dBm @ 6~24Mbps 16dBm @ 36~54Mbps	Load Balancing**	8 schemes for multiple WAN
3)	19/18dBm @ MCS0 (HT20/40)	Fixed	Manually route by traffic type through fixed WAN link.
	16/16dBm @ MCS7 (HT20/40)	Basic Package	
	19/18/18dBm @ MCS0 (VHT20/40/80)	Failover	Routes connections through preferred WAN link while
			others stand by Sequentially activate another link if
	13/13/13dBm @ MCS8 (VHT20/40/80)		others stand-by. Sequentially activate another link if
	13/13dBm @ MCS9 (VHT40/80)	Priority	preferred link failure occurs.
	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB	Priority	preferred link failure occurs. Routes connections through preferred WAN link while
	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≦-92dBm @ 6~18Mbps	Priority	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if
	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≦ -92dBm @ 6~18Mbps ≦ -86dBm @ 24Mbps		preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs.
	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≦-92dBm @ 6~18Mbps	Weighted	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links
	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≦ -92dBm @ 6~18Mbps ≦ -86dBm @ 24Mbps ≦ -84dBm @ 36Mbps		preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs.
	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6~18Mbps ≤ -86dBm @ 24Mbps ≤ -84dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40)	Weighted Round-Robin Custom Route	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address.
	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≦ -92dBm @ 6~18Mbps ≦ -86dBm @ 24Mbps ≦ -84dBm @ 36Mbps ≦ -81dBm @ 48Mbps ≦ -80dBm @ 54Mbps ≦ -93dBm @ MCS0 (HT20/40) ≦ -71dBm/≦-80dBm @ MCS7 (HT20/40)	Weighted Round-Robin Custom Route Full Package in	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. ccl. basic package**
	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≦ -92dBm @ 6-18Mbps ≤ -86dBm @ 24Mbps ≤ -84dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤-80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80)	Weighted Round-Robin Custom Route	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. cl. basic package** Binding all connections in an application session to
	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≦ -92dBm @ 6~18Mbps ≦ -86dBm @ 24Mbps ≦ -84dBm @ 36Mbps ≦ -81dBm @ 48Mbps ≦ -80dBm @ 54Mbps ≦ -93dBm @ MCS0 (HT20/40) ≦ -71dBm/≦-80dBm @ MCS7 (HT20/40)	Weighted Round-Robin Custom Route Full Package in	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. cl. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the
Encryption Security	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6~18Mbps ≤ -86dBm @ 24Mbps ≤ -81dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤-80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -69dBm @ MCS8 (VHT20/40/80)	Weighted Round-Robin Custom Route Full Package in	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. cl. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is
Encryption Security	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6~18Mbps ≤ -86dBm @ 24Mbps ≤ -84dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤-80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -66dBm @ MCS9 (VHT40/80)	Weighted Round-Robin Custom Route Full Package in Sticky Session*	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. ncl. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.
Encryption Security	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≦ -92dBm @ 6~18Mbps ≤ -86dBm @ 24Mbps ≤ -84dBm @ 36Mbps ≤ -84dBm @ 48Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤-80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -69dBm @ MCS9 (VHT20/40/80) ≤ -66dBm @ MCS9 (VHT40/80) WEP : (64-bit ,128-bit key supported) WPA./WPA2 : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported)	Weighted Round-Robin Custom Route Full Package in	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. cl. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Routes connections through the WAN link with
Encryption Security	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6~18Mbps ≤ -86dBm @ 24Mbps ≤ -84dBm @ 36Mbps ≤ -84dBm @ 48Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤-80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -69dBm @ MCS8 (VHT20/40/80) ≤ -66dBm @ MCS9 (VHT40/80) WEP : (64-bit ,128-bit key supported) WPA./WPA2 : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) OKC** and 802.11r**	Weighted Round-Robin Custom Route Full Package in Sticky Session*	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. ncl. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.
Encryption Security	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6-18Mbps ≤ -92dBm @ 24Mbps ≤ -86dBm @ 24Mbps ≤ -84dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤-80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -69dBm @ MCS8 (VHT20/40/80) ≤ -69dBm @ MCS9 (VHT40/80) S -66dBm @ MCS9 (VHT40/80) WPA /WPA2 : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) OKC** and 802.11r** EAP,MD5,EAP,TLS,EAP,TTLS,EAP	Weighted Round-Robin Custom Route Full Package in Sticky Session*	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. rcl. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Routes connections through the WAN link with highest free bandwidth ratio.
	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6-18Mbps ≤ -92dBm @ 24Mbps ≤ -84dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -81dBm @ 54Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤-80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -69dBm @ MCS9 (VHT20/40/80) ≤ -69dBm @ MCS9 (VHT20/40/80) ≤ -66dBm @ MCS9 (VHT40/80) WEP : (64-bit, 128-bit key supported) WPA.WPA2 : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) OKC** and 802.11** EAP,MD5,EAP,TLS,EAP,TTLS,EAP MsCHAPv3 and PEAP **	Weighted Round-Robin Custom Route Full Package in Sticky Session*	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. ct. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN
Wireless Security	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6~18Mbps ≤ -86dBm @ 24Mbps ≤ -86dBm @ 24Mbps ≤ -81dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -80dBm @ 54Mbps ≤ -80dBm @ MCS0 (HT20/40) ≤ -71dBm/≤-80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -60dBm @ MCS9 (VHT40/80) ≤ -66dBm @ MCS9 (VHT40/80) WPA / WPA2 : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) OKC** and 802.11r** EAP,MD5,EAP,TLS,EAP,TTLS,EAP MsCHAPv3 and PEAP ** SSID broadcast disable**	Weighted Round-Robin Custom Route Full Package in Sticky Session*	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. ccl. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
Wireless Security Cellular Inte	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6-18Mbps ≤ -86dBm @ 24Mbps ≤ -84dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≦-80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -69dBm @ MCS8 (VHT20/40/80) ≤ -69dBm @ MCS9 (VHT40/80) WEP : (64-bit, 128-bit key supported) WPA.WPA2 : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) OKC** and 802.11r** EAP,MD5,EAP,TLS,EAP,TTLS,EAP MsCHAPv3 and PEAP ** SSID broadcast disable** fface	Weighted Round-Robin Custom Route Full Package in Sticky Session*	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. col. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic Routes connections through the WAN link with lowest
Wireless Security	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6~18Mbps ≤ -86dBm @ 24Mbps ≤ -86dBm @ 24Mbps ≤ -81dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -80dBm @ 54Mbps ≤ -80dBm @ MCS0 (HT20/40) ≤ -71dBm/≤-80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -60dBm @ MCS9 (VHT40/80) ≤ -66dBm @ MCS9 (VHT40/80) WPA / WPA2 : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) OKC** and 802.11r** EAP,MD5,EAP,TLS,EAP,TTLS,EAP MsCHAPv3 and PEAP ** SSID broadcast disable**	Weighted Round-Robin Custom Route Full Package in Sticky Session* Smallest Load* Fastest*	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. ccl. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
Wireless Security Cellular Inte	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6-18Mbps ≤ -86dBm @ 24Mbps ≤ -86dBm @ 24Mbps ≤ -81dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -80dBm @ 54Mbps ≤ -80dBm @ MCS0 (HT20/40) ≤ -71dBm/≤-80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -60dBm @ MCS9 (VHT40/80) ≤ -66dBm @ MCS9 (VHT40/80) WEP : (64-bit ,128-bit key supported) WPA /WPA2 : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) OKC** and 802.11r** EAP,MD5,EAP,TLS,EAP,TTLS,EAP MsCHAPv3 and PEAP ** SSID broadcast disable** face Detachable antenna connectors x 3; SMA/QMA*** type female connector (Main, Aux, GPS) GPS, Glonass (EU/Americas)	Weighted Round-Robin Custom Route Full Package in Sticky Session* Smallest Load* Fastest* Fast Roaming<50ms**	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. cl. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic Routes connections through the WAN link with lowest latency time. 802.11r <50ms work with Lantech controller
Wireless Security Cellular Inte Antenna Connector Location Solutions	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6~18Mbps ≤ -86dBm @ 24Mbps ≤ -86dBm @ 24Mbps ≤ -81dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤-80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -69dBm @ MCS9 (VHT40/80) ≤ -66dBm @ MCS9 (VHT40/80) WEP : (64-bit ,128-bit key supported) WPA./WPA2 : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) WCA** and 802.11r** EAP,MD5,EAP,TLS,EAP,TTLS,EAP MsCHAPv3 and PEAP ** SSID broadcast disable** face Detachable antenna connectors x 3; SMA/QMA** type female connector (Main, Aux, GPS) GPS, Glonass (EU/Americas) GPS, Glonass, Beidou, Galileo (APAC model only)	Weighted Round-Robin Custom Route Full Package in Sticky Session* Smallest Load* Fastest* Fast Roaming<50ms** WMM	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. ncl. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic Routes connections through the WAN link with lowest latency time. 802.11r <50ms work with Lantech controller Wifi multimedia and 802.11e traffic prioritization
Wireless Security Cellular Inte Antenna Connector	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6-18Mbps ≤ -92dBm @ 24Mbps ≤ -84dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤-80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -69dBm @ MCS8 (VHT20/40/80) ≤ -69dBm @ MCS9 (VHT40/80) ≤ -66dBm @ MCS9 (VHT40/80) WPA : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) OKC** and 802.11r** EAP,MD5,EAP,TLS,EAP,TTLS,EAP MsCHAPv3 and PEAP ** SSID broadcast disable** face Detachable antenna connectors x 3; SMA/QMA** type female connector (Main, Aux, GPS) GPS, Glonass, Eu/Americas) GPS, Glonass, Beidou, Gallieo (APAC model only) APAC & Australia (APAC model)	Weighted Round-Robin Custom Route Full Package in Sticky Session* Smallest Load* Fastest* Fast Roaming<50ms**	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. cl. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic Routes connections through the WAN link with lowest latency time. 802.11r <50ms work with Lantech controller
Wireless Security Cellular Inte Antenna Connector Location Solutions	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6-18Mbps ≤ -86dBm @ 24Mbps ≤ -86dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤-80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -69dBm @ MCS9 (VHT40/80) Sefect and 802.11 WEP : (64-bit ,128-bit key supported) WPA /WPA2 : IEEE802.11i(WEP and AES encryption) WPA-SK (256-bit key pre-shared key supported) OKC** and 802.11** EAP,MD5,EAP,TLS,EAP,TTLS,EAP MsCHAPv3 and PEAP ** SSID broadcast disable** Tface Detachable antenna connectors x 3; SMA/QMA** type female connector (Main, Aux, GPS) GPS, Glonass (EU/Americas) GPS, Glonass, Beidou, Galileo (APAC model only) APAC & Australia (APAC model) LTE:	Weighted Round-Robin Custom Route Full Package in Sticky Session* Smallest Load* Fastest* Fastest* Fast Roaming<50ms** WMM Security	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. cl. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic Routes connections through the WAN link with lowest latency time. 802.11r <50ms work with Lantech controller Wifi multimedia and 802.11e traffic prioritization WEP64/128bits/WPA/WPA-PSK (TKIP*,AES)/WPA2/WPA2-PSK (TKIP*,AES)/WPA2/WPA2-PSK
Wireless Security Cellular Inte Antenna Connector Location Solutions	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6-18Mbps ≤ -92dBm @ 24Mbps ≤ -84dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤-80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -69dBm @ MCS8 (VHT20/40/80) ≤ -69dBm @ MCS9 (VHT40/80) ≤ -66dBm @ MCS9 (VHT40/80) WPA : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) OKC** and 802.11r** EAP,MD5,EAP,TLS,EAP,TTLS,EAP MsCHAPv3 and PEAP ** SSID broadcast disable** face Detachable antenna connectors x 3; SMA/QMA** type female connector (Main, Aux, GPS) GPS, Glonass, Eu/Americas) GPS, Glonass, Beidou, Gallieo (APAC model only) APAC & Australia (APAC model)	Weighted Round-Robin Custom Route Full Package in Sticky Session* Smallest Load* Fastest* Fast Roaming<50ms** WMM	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. ncl. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic Routes connections through the WAN link with lowest latency time. 802.11r <50ms work with Lantech controller Wifi multimedia and 802.11e traffic prioritization WEP64/128bits/WPA/WPA-PSK (TKIP*,AES)/ WPA2-PSK (TKIP*,AES)/SSH/SSL/HTTPS Radius Authentication, EAP-MD5, EAP-TLS,
Wireless Security Cellular Inte Antenna Connector Location Solutions	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6-18Mbps ≤ -92dBm @ 24Mbps ≤ -84dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -81dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤-80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -90dBm @ MCS8 (VHT20/40/80) ≤ -66dBm @ MCS9 (VHT40/80) ≤ -66dBm @ MCS9 (VHT40/80) WPA WPA2 : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) OKC** and 802.11r** EAP,MD5,EAP,TLS,EAP,TTLS,EAP MsCHAPv3 and PEAP ** SSID broadcast disable** Tdetachable antenna connectors x 3; SMA/QMA** type female connector (Main, Aux, GPS) GPS, Glonass, Eeidou, Calileo (APAC model only) APAC & Australia (APAC model) LTE: 2100/1800/850/2600/900/850/850/1500/700/2600/19 00/2300/2500 MHz (B1/B3/B5/B7/B8/B18/B19/B21/B28/B38/B39/B40/B4	Weighted Round-Robin Custom Route Full Package in Sticky Session* Smallest Load* Fastest* Fastest* Fast Roaming<50ms** WMM Security	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. cl. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic Routes connections through the WAN link with lowest latency time. 802.11r <50ms work with Lantech controller Wifi multimedia and 802.11e traffic prioritization WEP64/128bits/WPA/WPA-PSK (TKIP*,AES)/WPA2/WPA2-PSK (TKIP*,AES)/WPA2/WPA2-PSK
Wireless Security Cellular Inte Antenna Connector Location Solutions	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6-18Mbps ≤ -86dBm @ 24Mbps ≤ -86dBm @ 24Mbps ≤ -81dBm @ 48Mbps ≤ -81dBm @ 54Mbps ≤ -80dBm @ 54Mbps ≤ -80dBm @ 54Mbps ≤ -80dBm @ MCS0 (HT20/40) ≤ -71dBm/≤ -80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/4080) ≤ -69dBm @ MCS9 (VHT40/80) ≤ -66dBm @ MCS9 (VHT40/80) ≤ -66dBm @ MCS9 (VHT40/80) WEP : (64-bit ,128-bit key supported) WPA /WPA2 : IEEE802,111(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) OKC** and 802.11r** EAP,MD5,EAP,TLS,EAP,TTLS,EAP MsCHAPv3 and PEAP ** SSID broadcast disable** Tface Detachable antenna connectors x 3; SMA/QMA*** type female connector (Main, Aux, GPS) GPS, Glonass, Beidou, Galileo (APAC model only) APAC & Australia (APAC model) LTE: 2100/1800/850/2600/900/850/850/1500/700/2600/19 00/2300/2500 MHz	Weighted Round-Robin Custom Route Full Package in Sticky Session* Smallest Load* Fastest* Fast Roaming<50ms** WMM Security Authentication SSID	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. cl. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic Routes connections through the WAN link with lowest latency time. 802.11r <50ms work with Lantech controller Wifi multimedia and 802.11e traffic prioritization WEP64/128bits/ WPA/ WPA-PSK (TKIP*,AES)/ WPA2/WPA2-PSK (TKIP*,AES)/ WPA2/WPA2-PSK (TKIP*,AES)/ WPA2/WPA2-PSK (TKIP*,AES)/ SSH/SSL/HTTPS Radius Authentication, EAP-MD5, EAP-TLS, EAP-TLS, EAP-TTLS, PEAP; SSID broadcast disable supported** 16 sets
Wireless Security Cellular Inte Antenna Connector Location Solutions	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6-18Mbps ≤ -86dBm @ 24Mbps ≤ -86dBm @ 24Mbps ≤ -81dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤-80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -69dBm @ MCS9 (VHT40/80) ≤ -66dBm @ MCS9 (VHT40/80) VPA -WPA2 : IEEE802.11i (WEP and AES encryption) WPAPSK (256-bit key pre-shared key supported) OKC** and 802.11r** EAP,MD5,EAP,TLS,EAP,TTLS,EAP MsCHAPv3 and PEAP ** SSID broadcast disable** Tface Detachable antenna connectors x 3; SMA/QMA** type female connector (Main, Aux, GPS) GPS, Glonass, Beidou, Galileo (APAC model only) APAC & Australia (APAC model) LTE: 2100/1800/850/2600/900/850/850/1500/700/2600/19 00/2300/2500 MHz (B1/B3/B5/B7/B8/B18/B19/B21/B28/B38/B39/B40/B4 1) <th>Weighted Round-Robin Custom Route Full Package in Sticky Session* Smallest Load* Fastest* Fast Roaming<50ms** WMM Security Authentication SSID Client mode</th> <th>preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. col. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic Routes connections through the WAN link with lowest latency time. 802.11r <50ms work with Lantech controller Wifi multimedia and 802.11e traffic prioritization WEP64/128bits/ WPA/WPA-PSK (TKIP*,AES)/ WPA2/WPA2-PSK (TKIP*,AES)/ CTKIP*, AES)/SSH/SSL/HTTPS Radius Authentication, EAP-MD5, EAP-TLS, EAP-TLS, EAP-TTLS, PEAP; SSID broadcast disable supported** 1</th>	Weighted Round-Robin Custom Route Full Package in Sticky Session* Smallest Load* Fastest* Fast Roaming<50ms** WMM Security Authentication SSID Client mode	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. col. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic Routes connections through the WAN link with lowest latency time. 802.11r <50ms work with Lantech controller Wifi multimedia and 802.11e traffic prioritization WEP64/128bits/ WPA/WPA-PSK (TKIP*,AES)/ WPA2/WPA2-PSK (TKIP*,AES)/ CTKIP*, AES)/SSH/SSL/HTTPS Radius Authentication, EAP-MD5, EAP-TLS, EAP-TLS, EAP-TTLS, PEAP; SSID broadcast disable supported** 1
Wireless Security Cellular Inte Antenna Connector Location Solutions	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6-18Mbps ≤ -92dBm @ 24Mbps ≤ -84dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -81dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤-80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -90dBm @ MCS8 (VHT20/40/80) ≤ -66dBm @ MCS9 (VHT40/80) ≤ -66dBm @ MCS9 (VHT40/80) WPA WPA2 : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) OKC** and 802.11r** EAP,MD5,EAP,TLS,EAP,TTLS,EAP MsCHAPv3 and PEAP ** SSID broadcast disable** Tdetachable antenna connectors x 3; SMA/QMA** type female connector (Main, Aux, GPS) GPS, Glonass, Eeidou, Calileo (APAC model only) APAC & Australia (APAC model) LTE: 2100/1800/850/2600/900/850/850/1500/700/2600/19 00/2300/2500 MHz (B1/B3/B5/B7/B8/B18/B19/B21/B28/B38/B39/B40/B4	Weighted Round-Robin Custom Route Full Package in Sticky Session* Smallest Load* Fastest* Fast Roaming<50ms** WMM Security Authentication SSID	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex. TCP/UDP port number and IP address. ct. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic Routes connections through the WAN link with lowest latency time. 802.11r <50ms work with Lantech controller Wifi multimedia and 802.11e traffic prioritization WEP64/128bits/WPA/WPA-PSK (TKIP*,AES)/ WPA2/WPA2-PSK (TKIP*,AES)/SSH/SSL/HTTPS Radius Authentication, EAP-MD5, EAP-TTLS, EAP-TTLS, PEAP; SSID broadcast disable supported** 16 sets PMK** Caching and pre-authentication. Built-in Real Time Clock to keep track of time
Wireless Security Cellular Inte Antenna Connector Location Solutions	13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6-18Mbps ≤ -86dBm @ 24Mbps ≤ -86dBm @ 24Mbps ≤ -81dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -93dBm @ MCS0 (VHT20/40) ≤ -90dBm @ MCS0 (VHT20/40) ≤ -66dBm @ MCS9 (VHT40/80) WEP : (64-bit ,128-bit key supported) WPA /WPA2 : IEEE802.11i (WEP and AES encryption) WPAPSK (256-bit key pre-shared key supported) OKC** and 802.11r** EAP,MD5,EAP,TLS,EAP,TTLS,EAP MsCHAPV3 and PEAP ** SSID broadcast disable** Tface Detachable antenna connectors x 3; SMA/QMA** type female connector (Main, Aux, GPS) GPS, Glonass, Eeidou, Gallieo (APAC model only) APAC & Australia (APAC model) LTE: 2100/1800/850/2600/900/850/850/1500/700/2600/19 0/2300/2500 MHz (B1/B3/B5/B7/B8/B18/B19/B21/B28/B38/B39/B40/B4 1) <td>Weighted Round-Robin Custom Route Full Package in Sticky Session* Smallest Load* Fastest* Fast Roaming<50ms** WMM Security Authentication SSID Client mode</td> <td>preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. col. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic Routes connections through the WAN link with lowest latency time. 802.11r <50ms work with Lantech controller</td> Wifi multimedia and 802.11e traffic prioritization WEP64/128bits/ WPA/WPA-PSK (TKIP*,AES)/ WPA2/WPA2-PSK (TKIP*,AES)/ CTKIP*, AES)/SSH/SSL/HTTPS Radius Authentication, EAP-MD5, EAP-TLS, EAP-TLS, EAP-TTLS, PEAP; SSID broadcast disable supported** 1	Weighted Round-Robin Custom Route Full Package in Sticky Session* Smallest Load* Fastest* Fast Roaming<50ms** WMM Security Authentication SSID Client mode	preferred link failure occurs. Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs. Evenly distribute the traffic over all working WAN links in circular order according to the specified weights Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address. col. basic package** Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc. Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic Routes connections through the WAN link with lowest latency time. 802.11r <50ms work with Lantech controller

Datasheet Version 5.4

www.lantechcom.tw | info@lantechcom.tw



SNMP trap	Device cold / warm start	indicator	(Red)
	Port link up / link down		Seria
	DI / DO high / low	10/100/1000Base-T	Link/A
Environmental	System status for input voltage, current, ambient	(X) port indicator	
Monitoring	temperature to be shown in GUI and sent alerting if	SIM	Greer
Ŭ	any abnormal status	GPS	Greer
Graphic signal	Graphic LTE & Wifi signal strength & TX / RX rate	WLAN LEDs	WLA
display	display	Fault	Red:
Remote	To reboot or get status of router by Web/SMS**	Fault contac	:t
Web/SMS** control	······································	Relay	Relay
Captive portal	Editable captive portal login page	Power	
Maintenance	Firmware upgradeable through TFTP/FTP/HTTP	Input power	Dual
Configuration	Supports text configuration file for quick system		mode
backup & restore	installation	Power consumption	18 Wa
·	USB port to upload/download configuration by USB	(Тур.)	
	dongle	Physical Ch	aract
	InstaView/AIR** for mass configuration/upgrade	Enclosure	IP 65/
Physical Po	rts & System	Dimension	178 (\
Connectors	10/100/1000T: 2x ports M12 8-pole X-coded with Auto	Weight	1kg
Connectors	MDI/MDI-X function (one port PD; 1LAN+1WAN or	Environmen	tal
	2LAN)	Storage	-40°C
	USB/Console connector: 1 x M12 8-pole A-coded	Temperature	
	DIDO : 1 x 5-pole terminal block Power Input	Operating	-20°C
	connector : 1 x M12 4-pole A-coded	Temperature	-40°C
	Serial connector : 2 DB9	Operating Humidity	5% to
	SIM card slots : 2	Regulatory a	
	SMA/QMA** connector for LTE: 3 (female)	EMI & EMS	FCC
	SMA/QMA** connector for Wi-Fi: 3 (male)		IEC/E
Serial Baud Rate	1000Kbps high data rate,250kbps normal for RS232;		CEE
	20Mbps high data rate,250kbps normal for		CE E
	RS422/485		CE E
Serial Data Bits	5, 6, 7, 8		CE E
Serial Parity	odd, even, none, mark, space		CE E
Serial Stop Bits	1, 1.5, 2		CE E
RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND	Stability Testing	EN61
RS-422	Tx+,Tx-, Rx+, Rx-,GND	Railway	EN50 EN45
RS-485 (2-wire)	Data+, Data-,GND		X70-1
Isolation protection	RS422/485 2.5KV isolation; 8KV contact & 15KV air		Fire 8
	RS232 8KV contact and 15KV air ESD	MTBF	565,0
	DIDO 3KV isolation		(IEC6
	Input power 1.5KVA isolation	Warranty	5 yea
DI/DO	2 Digital Input (DI) :		
	Level 0: -30~2V / Level 1: 10~30V		
	Max. input current:8mA		
	2 Digital Output(DO): Open collector to 40 VDC,		
	200mA		
LED Indicate	ors		
	Der unit: Deruer 1 (Creen) Deruer 2 (Creen) D Feil		

indicator	(Red), Ring Master(Green), System Ready(Green), Serial1/2(Green)
10/100/1000Base-T	Link/Activity (Green), Speed (Yellow)
(X) port indicator	
SIM	Green for Link/Act
GPS	Green for Link/Act
WLAN LEDs	WLAN 1 ,Link /ACT : Green
Fault	Red: Ethernet link down or power down
Fault contac	t
Relay	Relay output to carry capacity of 1A at 24VDC
Power	
Input power	Dual DC input, isolated 16.8VDC~137.5VDC for (WV model); Dual 9V~60VDC (24Vmodel)
Power consumption (Typ.)	18 Watts
Physical Cha	aracteristic
Enclosure	IP 65/54 aluminum case
Dimension	178 (W) x 99 (D) x 103 (H) mm
Weight	1kg
Environmen	tal
Storage	-40°C ~ 85°C (-40°F ~ 185°F)
Temperature	-20°C ~ 70°C (-4°F ~ 158°F)
Operating Temperature	$-20^{\circ}\text{C} \sim 70^{\circ}\text{C} (-4^{\circ}\text{F} \sim 158^{\circ}\text{F})$ $-40^{\circ}\text{C} \sim 70^{\circ}\text{C} (-40^{\circ}\text{F} \sim 158^{\circ}\text{F})$
Operating Humidity	5% to 95% Non-condensing
Regulatory a	5
· · ·	FCC Part 15 Class A
EMI & EMS	IEC/EN61000-6-2
	CE EN55032 Class A
	CE EN55024: CE EN61000-4-2 (ESD) Level 3
	CE EN61000-4-3 (RS) Level 3
	CE EN61000-4-4 (EFT) Level 3
	CE EN61000-4-5 ED3 (Surge) Level 3 CE EN61000-4-6 (CS) Level 3
	CE EN61000-4-8 (Magnetic field) Level 3
Stability Testing	EN61373 (Shock & Vibration)
Railway	EN50155/EN50121-3-2/EN50121-4 Verification
Kanway	EN45545-2 R24 (EN ISO 4589-2, EN ISO 5659-2, NF X70-100-1 & 2) Fire & Smoke Certificate
MTBF	565.049 Hrs
	(IEC62830 standards)
Warranty	5 years
	*Future Release

**Optional

Power & system Per unit: Power 1 (Green), Power 2 (Green), P-Fail

RF Performance Table

	Data Rate	TX Power (per chain)	TX Power (3 chains)	Tolerance	RX Specifications Sensitivity	Tolerance
2.4GHz	1Mbps	20dBm	25dBm	±2dB	-95dBm	±2dB
	2Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
802.11b	5.5Mbps	20dBm	25dBm	±2dB	-92dBm	±2dB
	11Mbps	20dBm	25dBm	±2dB	-90dBm	±2dB
	6Mbps	21dBm	26dBm	±2dB	-94dBm	±2dB
	9Mbps	21dBm	26dBm	±2dB	-93dBm	±2dB
	12Mbps	21dBm	26dBm	±2dB	-92dBm	±2dB
2.4GHz	18Mbps	21dBm	26dBm	±2dB	-90dBm	±2dB
802.11g	24Mbps	21dBm	26dBm	±2dB	-88dBm	±2dB
	36Mbps	20dBm	25dBm	±2dB	-85dBm	±2dB
	48Mbps	19dBm	24dBm	±2dB	-81dBm	±2dB
	54Mbps	18dBm	23dBm	±2dB	-80dBm	±2dB
	MCS 0	21dBm	26dBm	±2dB	-94dBm	±2dB
	MCS 1	21dBm	26dBm	±2dB	-91dBm	±2dB
2.4GHz 802.11n	MCS 2	21dBm	26dBm	±2dB	-89dBm	±2dB
HT20	MCS 3	20dBm	25dBm	±2dB	-84dBm	±2dB
	MCS 4	20dBm	25dBm	±2dB	-83dBm	±2dB
	MCS 5	20dBm	25dBm	±2dB	-78dBm	±2dB

Datasheet Version 5.4 www.lantechcom.tw | info@lantechcom.tw



	MCS 6	18dBm	23dBm	±2dB	-78dBm	±2dB
	MCS 7	16dBm	21dBm	±2dB	-76dBm	±2dB
	MCS 0	20dBm	25dBm	±2dB	-92dBm	±2dB
	MCS 1	20dBm	25dBm	±2dB	-89dBm	±2dB
	MCS 2	20dBm	25dBm	±2dB	-87dBm	±2dB
2.4GHz	MCS 3	19dBm	24dBm	±2dB	-82dBm	±2dB
802.11n HT40	MCS 4	19dBm	24dBm	±2dB	-80dBm	±2dB
	MCS 5	19dBm	24dBm	±2dB	-78dBm	±2dB
	MCS 6	18dBm	23dBm	±2dB	-77dBm	±2dB
	MCS 7	16dBm	21dBm	±2dB	-73dBm	±2dB

	Data Rate	TX Power (per chain)	TX Power (3 chains)	Tolerance	RX Specifications Sensitivity	Tolerance
	6Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	9Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	12Mbps	20dBm	25dBm	±2dB	-92dBm	±2dB
5GHz	18Mbps	20dBm	25dBm	±2dB	-90dBm	±2dB
802.11a	24Mbps	20dBm	25dBm	±2dB	-86dBm	±2dB
	36Mbps	18dBm	23dBm	±2dB	-84dBm	±2dB
	48Mbps	16dBm	21dBm	±2dB	-81dBm	±2dB
	54Mbps	15dBm	20dBm	±2dB	-80dBm	±2dB
	MCS 0	19dBm	24dBm	±2dB	-93dBm	±2dB
	MCS 1	19dBm	24dBm	±2dB	-90dBm	±2dB
	MCS 2	19dBm	24dBm	±2dB	-87dBm	±2dB
	MCS 3	18dBm	23dBm	±2dB	-83dBm	±2dB
5GHz 802.11n/ac	MCS 4	18dBm	23dBm	±2dB	-80dBm	±2dB
VHT20	MCS 5	17dBm	22dBm	±2dB	-77dBm	±2dB
	MCS 6	16dBm	21dBm	±2dB	-74dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-73dBm	±2dB
	MCS 8	13dBm	18dBm	±2dB	-71dBm	±2dB
	MCS 0	18dBm	23dBm	±2dB	-90dBm	±2dB
	MCS 1	18dBm	23dBm	±2dB	-88dBm	±2dB
	MCS 2	18dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 3	17dBm	22dBm	±2dB	-82dBm	±2dB
5GHz	MCS 4	17dBm	22dBm	±2dB	-80dBm	±2dB
802.11n/ac	MCS 5	16dBm	21dBm	±2dB	-75dBm	±2dB
VHT40	MCS 6	15dBm	20dBm	±2dB	-73dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-73dBm	±2dB
	MCS 8	13dBm	18dBm	±2dB	-70dBm	±2dB
	MCS 9	13dBm	18dBm	±2dB	-68dBm	±2dB
	MCS 0	18dBm	23dBm	±2dB	-89dBm	±2dB
	MCS 1	18dBm	23dBm	±2dB	-87dBm	±2dB
	MCS 2	18dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 3	17dBm	22dBm	±2dB	-83dBm	±2dB
5GHz	MCS 4	17dBm	22dBm	±2dB	-80dBm	±2dB
802.11ac	MCS 5	16dBm	21dBm	±2dB	-78dBm	±2dB
VHT80	MCS 6	15dBm	20dBm	±2dB	-75dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-72dBm	±2dB
	MCS 8	13dBm	18dBm	±2dB	-70dBm	±2dB
	MCS 9	13dBm	18dBm	±2dB	-68dBm	±2dB

ORDERING INFOMATION

All QMA connector models are with -Q model name; -40~70C operational models are with -E model name.

TWMR-5002-1L-1AC-2S-24V-65-APAC......P/N: 8630-032

EN50155 Multifunction VPN Router w/1 WIFI 11ac + 1 LTE 4G SMA connectors+ 2 serial RS232 ports + 2 Gigabit X-coded



Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN, Protocol Gateway; APAC band; dual 9V ~60VDC; -20~70C; IP65 housing

TWMR-5002-1L-1AC-2S-24V-65-WW......P/N: 8630-033

EN50155 Multifunction VPN Router w/1 WIFI 11ac + 1 LTE 4G SMA connectors+ 2 serial RS232 ports + 2 Gigabit X-coded Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN, Protocol Gateway; Worldwide band; dual 9V ~60VDC; -20~70C; IP65 housing

TWMR-5002-1L-1AC-2SA-24V-65-EUNA......P/N: 8630-0311

EN50155 Multifunction VPN Router w/1 WIFI 11ac + 1 LTE 4G SMA connectors+ 2 serial RS422/485 ports + 2 Gigabit X-coded Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN, Protocol Gateway; EU and US band; dual 9V ~60VDC; -20~70C; IP65 housing

TWMR-5002-1L-1AC-2SA-24V-65-APAC......P/N: 8630-0321

EN50155 Multifunction VPN Router w/1 WIFI 11ac + 1 LTE 4G SMA connectors+ 2 serial RS422/485 ports + 2 Gigabit X-coded Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN, Protocol Gateway; APAC band; dual 9V ~60VDC; -20~70C; IP65 housing

TWMR-5002-1L-1AC-2SA-24V-65-WW......P/N: 8630-0331

EN50155 Multifunction VPN Router w/1 WIFI 11ac + 1 LTE 4G SMA connectors+ 2 serial RS422/485 ports + 2 Gigabit X-coded Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN, Protocol Gateway; Worldwide band; dual 9V ~60VDC; -20~70C; IP65 housing

- TWMR-5002-1L-1AC-2S-WV-65-APAC
 P/N: 8630-042

 EN50155 Multifunction VPN Router w/1 WIFI 11ac + 1 LTE 4G SMA connectors+ 2 serial RS232 ports + 2 Gigabit X-coded
 Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN, Protocol Gateway; APAC band; dual isolated 16.8V~137.5VDC;
- -20-70C; IP65 housing
 TWMR-5002-1L-1AC-2S-WV-65-WW......P/N: 8630-043

EN50155 Multifunction VPN Router w/1 WIFI 11ac + 1 LTE 4G SMA connectors+ 2 serial RS232 ports + 2 Gigabit X-coded Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN, Protocol Gateway; Worldwide band; dual isolated 16.8V~137.5VDC; -20~70C; IP65 housing

EN50155 Multifunction VPN Router w/1 WIFI 11ac + 1 LTE 4G SMA connectors+ 2 serial RS422/485 ports + 2 Gigabit X-coded Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN, Protocol Gateway; EU and US band; dual isolated 16.8V~137.5VDC; -20~70C; IP65 housing

- TWMR-5002-1L-1AC-2SA-WV-65-APAC......P/N: 8630-0421 EN50155 Multifunction VPN Router w/1 WIFI 11ac + 1 LTE 4G SMA connectors+ 2 serial RS422/485 ports + 2 Gigabit X-coded Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN, Protocol Gateway; APAC band; dual isolated 16.8V~137.5VDC; -20~70C; IP65 housing

- TWMR-5002-1L-1AC-2SA-24V-54-EUNA......P/N: 8630-0111

EN50155 Multifunction VPN Router w/1 WIFI 11ac + 1 LTE 4G SMA connectors+ 2 serial RS422/485 ports + 2 Gigabit X-coded Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN, Protocol Gateway; EU and US band; dual 9V ~60VDC; -20~70C; IP54 housing

TWMR-5002-1L-1AC-2SA-24V-54-APAC......P/N: 8630-0121

EN50155 Multifunction VPN Router w/1 WIFI 11ac + 1 LTE 4G SMA connectors+ 2 serial RS422/485 ports + 2 Gigabit X-coded Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN, Protocol Gateway; APAC band; dual 9V ~60VDC; -20~70C; IP54 housing

- TWMR-5002-1L-1AC-2S-WV-54-EUNA......P/N: 8630-021
- EN50155 Multifunction VPN Router w/1 WIFI 11ac + 1 LTE 4G SMA connectors+ 2 serial RS232 ports + 2 Gigabit X-coded

Datasheet Version 5.4 www.lantechcom.tw | info@lantechcom.tw



Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN, Protocol Gateway; EU and US band; dual isolated 16.8V~137.5VDC; -20~70C; IP54 housing

- TWMR-5002-1L-1AC-2S-WV-54-APAC......P/N: 8630-023 EN50155 Multifunction VPN Router w/1 WIFI 11ac + 1 LTE 4G SMA connectors+ 2 serial RS232 ports + 2 Gigabit X-coded Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN, Protocol Gateway; APAC band; dual isolated 16.8V~137.5VDC; -20~70C: IP54 housing TWMR-5002-1L-1AC-2S-WV-54-WW......P/N: 8630-022 EN50155 Multifunction VPN Router w/1 WIFI 11ac + 1 LTE 4G SMA connectors+ 2 serial RS232 ports + 2 Gigabit X-coded Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN, Protocol Gateway; Worldwide band; dual isolated 16.8V~137.5VDC; -20~70C: IP54 housing TWMR-5002-1L-1AC-2SA-WV-54-EUNA......P/N: 8630-0211 EN50155 Multifunction VPN Router w/1 WIFI 11ac + 1 LTE 4G SMA connectors+ 2 serial RS422/485 ports + 2 Gigabit X-coded Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN, Protocol Gateway; EU and US band; dual isolated 16.8V~137.5VDC; -20~70C; IP54 housing TWMR-5002-1L-1AC-2SA-WV-54-APAC......P/N: 8630-0221 EN50155 Multifunction VPN Router w/1 WIFI 11ac + 1 LTE 4G SMA connectors+ 2 serial RS422/485 ports + 2 Gigabit X-coded Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN, Protocol Gateway; APAC band; dual isolated 16.8V~137.5VDC; -20~70C; IP54 housing TWMR-5002-1L-1AC-2SA-WV-54-WW......P/N: 8630-0231 EN50155 Multifunction VPN Router w/1 WIFI 11ac + 1 LTE 4G SMA connectors+ 2 serial RS422/485 ports + 2 Gigabit X-coded Ethernet (incl. 1PD) for load-balancing**, TWCC**, VPN, Protocol Gateway; Worldwide band; dual isolated 16.8V~137.5VDC; -20~70C; IP54 housing **MSD Series** USB to MicroSD 128GB Dongle.....P/N:8850-110 USB to MicroSD 256GB Dongle.....P/N:8850-113 Software License LOAD BALANCING Basic Package.....P/N: 9000-101 LOAD BALANCING Full Package.....P/N: 9000-102 TWCC......P/N: 9000-103
- DNP3 GATEWAY......P/N: 9000-106
 WIRELESS ROAMINGP/N: 9000-107

Lantech Communications Global Inc.

www.lantechcom.tw info@lantechcom.tw

© 2018 Copyright Lantech Communications Global Inc. all rights reserved. The revise authority rights of product specifications belong to Lantech Communications Global Inc. Lantech may make changes to specification and product descriptions at anytime, without notice.