

Termination Resistor
(Disabled when open)

CAN Cable
Connector


USB Input

Mounting hole

Features

- CANbus 2.0B backward compatible with 2.0A
- Support baud rate 100/125/250/500(default)/800/1000K
- Support CAN message acceptance filter
- Keep configuration after hardware reboot
- Up to 6000 CAN messages per second (receive data)
- Support Listen-only mode
- Additional driver to support Linux SocketCAN
- Support SAE J1939/CANopen high layer protocol
- Termination resistor enabled/disabled by jumper
- Complies with EN61000-4-5 2.5kV Surge protection
- Complies with IEC 60950-1:2005 + A1: 2009 + A2:2013 2.5kV HiPOT protection
- Complies with EN61000-4-2 (ESD) Air-15kV, Contact-8kV
- Supports 3rd mounting hole and USB Pin header for out-of-minicard installation
- 30μ" golden finger, 3-year warranty
- Supports -40 to +85 degrees
- Industrial design, manufactured in Innodisk Taiwan

Mechanical Drawing

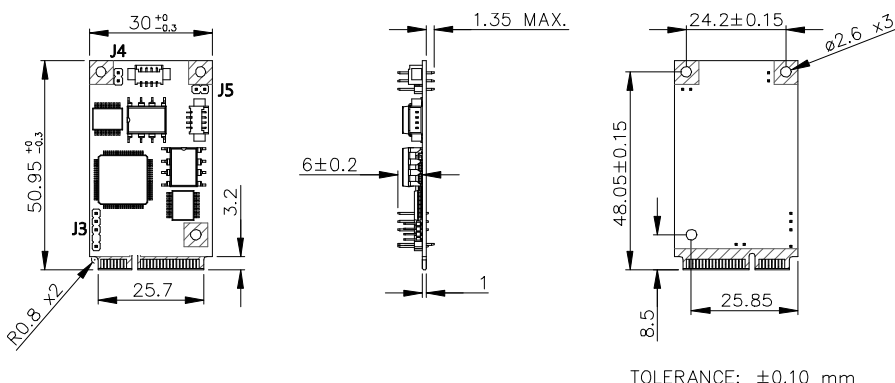

CAN DB9 Connector Pin Define		USB In Pin Define	
		1	5V
1	NC	2	D -
2	CAN-L	3	D+
3	GND		
4	NC	4	GND
5	NC	CAN Connector Pin Define	
6	NC	1	NC
7	CAN-H	2	CAN-H
8	NC	3	CAN-L
9	NC	4	GND

Specifications

Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan

Tel: +886-2-7703-3000

Email: sales@innodisk.com

Branch Offices:

USA

usasales@innodisk.com
+1-510-770-9421

Europe

eusales@innodisk.com
+31-40-3045-400

Japan

jpsales@innodisk.com
+81-3-6667-0161

China

sales_cn@innodisk.com
+86-755-2167-3689

www.innodisk.com

© 2019 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

September 12, 2020

Form-Factor	mPCIe
Input I/F	USB 2.0
Output I/F	CANbus 2.0B
Output Connector	2 x DB-9
Power Consumption	MAX : 3.33W (5V, 665mA; 3.3V, 1008mA)
Dimension (WxLxH)	30 x 50.9 x 8.35 mm
Temperature	Operation: W/T: -40°C ~ +85°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	Download driver and API from MyInnodisk website. Windows: XP(32bit), 7(32/64bit), 8/8.1(32/64bit), 10(32/64bit) Linux: Kernel 2.6 and above (Native CDC-ACM driver), Kernel 2.6.38 and above (SocketCAN Driver), 32/64bit QNX: 6.6

Order information

EMUC-B202-W23-G36 (CAN2.0B, J1939, CANopen, Wide Temp.)

USB to dual isolated CANbus 2.0B/J1939/CANopen Module

Innodisk EMUC CANbus Module Comparison

Innodisk CANbus Module (O: support X:Not Support)					
Model	EMUC-B201	EMUC-B202			
P/N	EMUC-B201-W1	EMUC-B202-W1	EMUC-B202-W2	EMUC-B202-W3	EMUC-B202-W23-G36
Support protocol	2.0B	2.0B	2.0B/J1939	2.0B/CANopen	2.0B/J1939/CANopen
Input Interface	USB 2.0				
Output ports	2				
Supported API (v1 and v2 are not compatible with each other)					
Basic CAN 2.0B (v1.0.0)	O	X			
Basic CAN 2.0B (v2.0.0)	X	O			
J1939	X	X	O	X	O
CANopen	X	X	X	O	O
Supported baud rate (Kbps)					
50K	O	X			
100K	X	O			
125K	O	O			
250K	O	O			
500K	O	O			
800K	X	O			
1000K	O	O			
Feature					
HiPOT	2500V				
Surge	2500V				
ESD	Air-15kV, Contact-8kV				
Temperature	-40~+85℃				
Performance	1000 frames/sec	6000 frames/sec			
SocketCAN	O	O			
Acceptance filter	X	O			
Save config	X	O			
CAN inactive mode	X	O			
Listen mode	X	O			
Error status	X	O			
Firmware upgrade	X	O			