

LCD display



Remote Control and AAA Batteries




Quick start guide



Power Cord



RS232 Cable



RS232 Daisy Chain Cable



USB Cover



IR Sensor Cable



Philips Logo plate




AC Switch Cover




Cable Clip x 3PCS

\* Differences according to regions.



Display design and accessories may differ from those illustrated above.






1

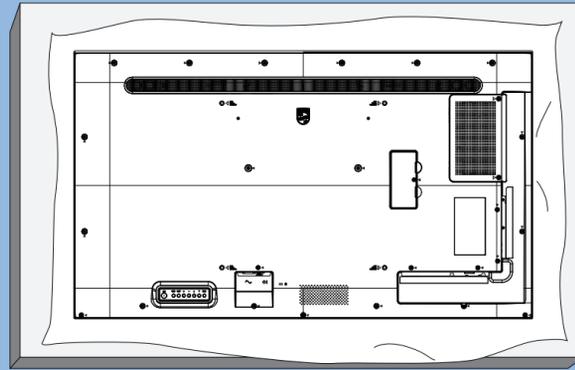

2

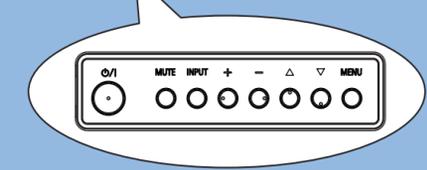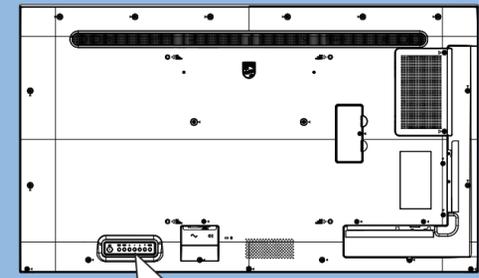

3

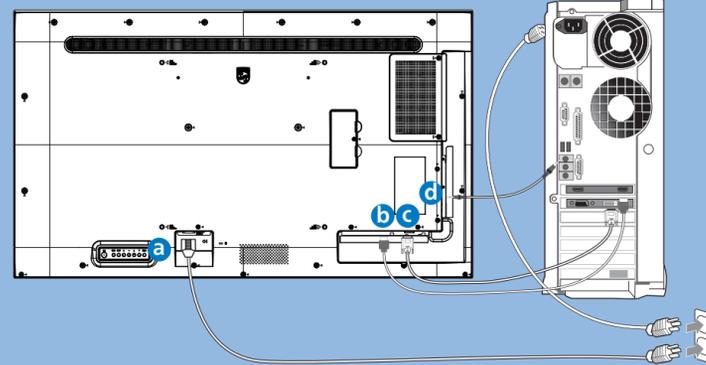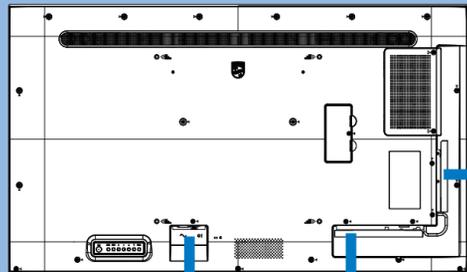

AC IN



HDMI



DVI



AUDIO



HDMI 1 IN



HDMI 2 IN



DVI-I IN



RS232 IN



RS232 OUT



IR-IN



IR-OUT



AUDIO OUT



PC LINE IN



USB Service Port




USB 2.0



RJ45

4

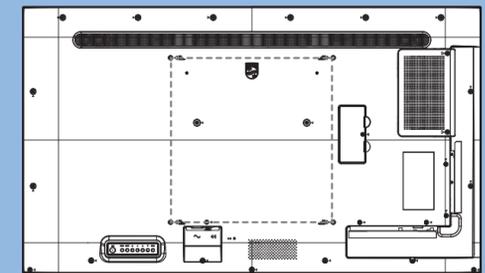




M6 \* (10+X) mm  
(X=Thickness of Wall mount BKT)

43BDL3511Q: 200mmx200mm

50BDL3511Q: 400mmx400mm

55BDL3511Q: 400mmx400mm

5

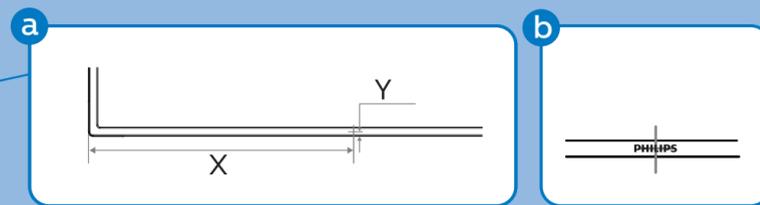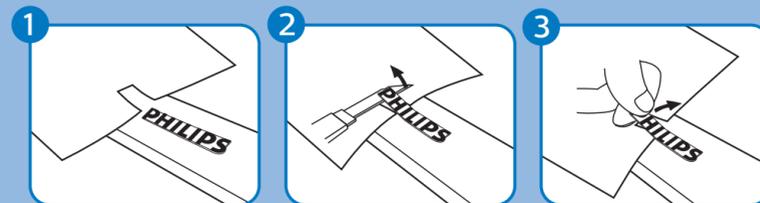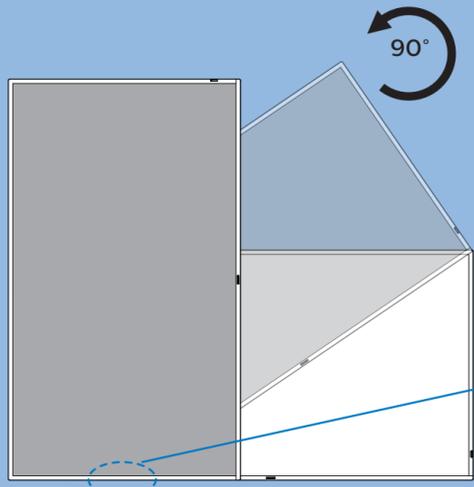


43BDL3511Q: X=280.6mm Y=7.4mm  
 50BDL3511Q: X=324.5mm Y=7.9mm  
 55BDL3511Q: X=356.3mm Y=7.4mm

PHILIPS

Professional Display Solutions

Q Line

43BDL3511Q/50BDL3511Q  
55BDL3511Q

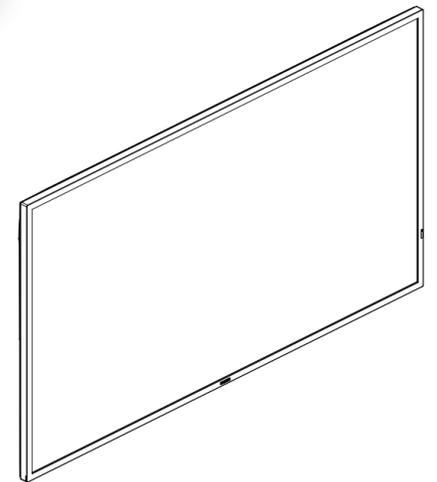

# Quick Start



Please check out the website below for more product information.  
[www.philips.com/signagesolutions-support](http://www.philips.com/signagesolutions-support)



Envision Peripherals Inc.  
 490 N McCarthy Blvd, Suite #120  
 Milpitas, CA 95035  
 USA

2021 © TOP Victory Investments Ltd. All rights reserved.  
 This product has been manufactured by and is sold under the responsibility of Top Victory Investments Ltd., and Top Victory Investments Ltd. is the warrantor in relation to this product. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. and are used under license.

Specifications are subject to change without notice.

Version: V1.01 2021-12-03

