# DRP-R150C

150W, Singe Output 24V Continuous Output Power, Power Sharing, Redundancy Function and Din-Rail Mounting.









	Input	Voltage	The range of input voltage is from 90VAC to 264VAC
		Frequency	The range of input frequency is from 47Hz to 63Hz.
		Input Current	The input current is 115VAC/4A, 230V/2A at rated load.
		Inrush Current	The maximum inrush current will not exceed 30A at 115VAC input or 60A at 230VAC input, cold start, 25oC.
	Output	Load Range	
		output	+24V
		Min. Load	0A
		Max. Load	6.25A (At factory, the +24V is setting to 23.80V to 24.20V at 60% rated load and nominal line.)
		Voltage accuracy	23.52V to 24.48V
		Line regulation	The line regulation is less than + -1% while measuring at rated load and + -10% of input voltage
		Load regulation	The load regulation for $\pm 24$ V is less than $\pm -2\%$ , which is measured by changing the tested output load from 0% to 100% of the rated load, and nominal line.
	General Specification	Watt	150W
		Hold up Time	Hold up time is longer than 32ms at 115VAC input, rated load which is measuring from the end of the last charging pules to when the main output drops down to 95% of output voltage.
		Efficiency	The efficiency is 87% typical by measured at nominal line and rated load
		MTBF	304,592 hours on max load at +25°C
		Power sharing & Redundancy	Power sharing means that the load can be shared the output load in 45-55% connected redundancy means that when one power supply fail. the other power supply will take over. N+1 unit is the idea for redundancy
		Temperature	Operating temperature : -10°C ~ 70°C, Srorage : -40°C ~ 80°C,
		Derating	-10°C~50°C full loading; 70°C 70% loading
		Dimensions	210 x 85.6 x 133.5 (mm)








#### **Features**

- 1. With Din-rail mounting
- 2. Power sharing and redundant capability
- 3.87% efficiency
- 4. Front panel indicator

### Dimensions (Unit: mm)

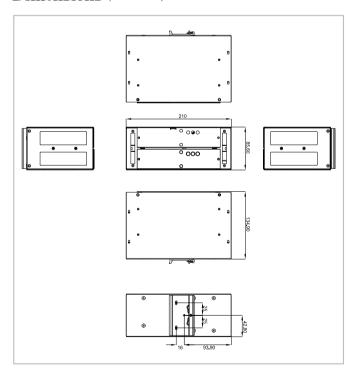

## **Ordering Information**

Part No.	Description
DRP-R150C-R10	150W, singe output 24V continuous output power, power sharing, redundancy function and Din-Rail mounting.
DRP-R150C1-R10	150W continuous output redundant power module for DRP-R150C-R10.