



Philips Signage Solutions  
D-Line Display

86"

Powered by Android  
500cd/m<sup>2</sup>

**Signage**Solutions

86BDL4150D

## Say more

Smart, fast 24/7 display.

Make it stand out with a fast D-Line professional 4K UHD display. Philips' superb picture quality ensures true colours and intense contrast. You can effortlessly display content from multiple sources on a single screen.

### **Superb picture. Blazing processor speed.**

- 4K UHD. Superb picture. Clear contrast.
- IPS panel: rich color consistency from every angle
- Android 7. Dedicated Android processor
- Proof of Play for Android content. Know what's playing
- Integrated dual-band WiFi

### **Effortless setup. Total control.**

- CMND & Deploy. Install and launch apps remotely
- CMND & Control. Operate, monitor, maintain
- CMND & Create. Develop and launch your own content
- OPS slot. Embed a full-power PC. No cabling required
- Integrated mPCIe slot for optional 4G/LTE module

### **Cost-effective system solution**

- Integrated HTML5 browser. Play and control online content
- FailOver. Ensure your display never goes blank

# PHILIPS

# Highlights

## Powered by Android

Control your Philips professional display via an internet connection. The integrated Android OS (SoC) lets you install web and native Android apps directly to the display. A built-in scheduler makes it easy to launch apps and content based on time of day, or user.

## CMND & Control



Run your display network over a local (LAN) connection. CMND & Control allows you to perform vital functions like controlling inputs and monitoring display status. Whether you're in charge of one screen or 100.

## CMND & Create

Take control of your content with CMND & Create. A drag-and-drop interface makes it simple to publish your own content-whether it's a daily specials board or branded corporate information. Preloaded templates and integrated widgets ensure your stills, text, and video will be up and running in no time.


## CMND & Deploy

Quickly install and launch any app-even when you're off-site and working remotely. CMND & Deploy lets you add and update your own apps, as well as apps from the Philips Professional Display App Store. Simply scan the QR code, log in to the store, and click on the app you want to install. The app is automatically downloaded and launched.

## Integrated mPCIe slot

Easily connect 4G/LTE modules to your Philips professional display. The integrated mPCIe slot enables your display to communicate with other devices that share the same wireless connectivity. Invaluable if you're installing displays in locations such as banks or government buildings, where you cannot get onto the local network.


## FailOver



From waiting room to meeting room, never show a blank screen. FailOver lets your Philips Professional Display switch automatically between primary and secondary inputs

ensuring content keeps playing even if the primary source goes down. Simply set a list of alternate inputs to be sure your business is always on.

## QuadViewer



Turn a single Philips Professional Display into a bezel-free 2x2 videowall. By connecting four independent sources, you can effortlessly play multiple channels at once. Simply tell the display which zone should play which content. Ideal for situations like broadcast control rooms, where feeds from multiple cameras need to be clearly visible.

## Proof of Play

Be sure your Android-powered Philips Professional Display is showing the right content-even when you're not there. When playing content via the embedded media player, you can set up your display to take automatic screenshots at regular intervals. Screenshots are stored on the display's internal memory, and you can choose to receive them via email.

# Specifications

## Picture/Display

- Diagonal screen size: 85.6 inch / 217.4 cm
- Panel resolution: 3840 x 2160
- Optimum resolution: 3840 x 2160 @60Hz
- Brightness: 500 cd/m<sup>2</sup>
- Contrast ratio (typical): 1200:1
- Dynamic contrast ratio: 500,000:1
- Aspect ratio: 16:9
- Response time (typical): 12 ms
- Pixel pitch: 0.4935 x 0.4935 mm
- Display colors: 1.07 Billion
- Viewing angle (H / V): 178 / 178 degree
- Picture enhancement: 3/2 - 2/2 motion pull down, 3D Combfilter, Motion compens. deinterlacing, 3D MA deinterlacing, Dynamic contrast enhancement, Progressive scan
- Operating system: Android 7.1.2

## Connectivity

- Video input: DVI-D, VGA (Analog D-Sub), DisplayPort (1.2), HDMI 2.0 x3
- Video output: DisplayPort
- Audio input: 3.5 mm jack
- Audio output: 3.5mm jack
- Other connections: mPCIe, micro SD, micro USB, USB power outlet (5 V, 2 amp), OPS, USB, type A
- External control: RJ45, RS232C (in/out) 2.5 mm jack

## Supported Display Resolution

### • Computer formats

| Resolution  | Refresh rate |
|-------------|--------------|
| 3840 x 2160 | 60Hz         |
| 1920 x 1080 | 60Hz         |
| 1600 x 1200 | 60Hz         |
| 1360 x 768  | 60Hz         |
| 1280 x 1024 | 60Hz         |
| 1280 x 800  | 60Hz         |
| 1280 x 768  | 60Hz         |
| 1024 x 768  | 60, 75Hz     |
| 640 x 480   | 60, 72, 75Hz |
| 720 x 400   | 70Hz         |
| 800 x 600   | 60, 75Hz     |

### • Video formats

| Resolution | Refresh rate |
|------------|--------------|
| 2160p      | 30, 50, 60Hz |
| 1080p      | 50, 60Hz     |
| 1080i      | 25, 30Hz     |
| 720p       | 50, 60Hz     |

|      |          |
|------|----------|
| 576i | 25, 50Hz |
| 576p | 25, 50Hz |
| 480i | 30, 60Hz |
| 480p | 30, 60Hz |

## Dimensions

- Set dimensions (W x H x D): 1927.9 x 1098.9 x 76.4 mm
- Set dimensions in inch (W x H x D): 75.90 x 43.26 x 3 inch
- Bezel width: 15.2 (T/L/R/B)
- Product weight (lb): 140.65 lb
- Product weight: 63.8 kg
- VESA Mount: 600(H)x400(V) mm, M8
- Smart Insert mount: 100 x 200 mm

## Convenience

- Placement: Landscape, Portrait
- Tiled Matrix: Up to 15 x 15
- Keyboard control: Hidden, Lockable
- Signal Loop Through: IR Loophrough, DisplayPort
- Network controllability: RJ45, RS232
- Energy saving functions: Smart Power
- Screen saving functions: Pixel Shift, Low Bright
- Ease of installation: Smart Insert
- Picture in picture: PIP

## Power

- Standby power consumption: <0.5 W
- Mains power: 100 ~ 240 VAC, 50 ~ 60 Hz
- Consumption (Typical): 262W +/- 10% W

## Operating conditions

- Temperature range (operation): 0 ~ 40 °C
- Temperature range (storage): -20 ~ 60 °C
- Relative humidity: 20 %~ 80%(operation), 10%-90%(storage) %
- Altitude: 0 ~ 3000 m
- MTBF: 50,000 hour(s)

## Sound

- Built-in speakers: 2 x 10W RMS

## Accessories

- Included accessories: Remote Control, Batteries for remote control, Quick start guide, RS232 cable, AC Power Cord, HDMI cable, IR sensor cable (1.8M)
- Included Accessories: RS232 daisy-chain cable, SD

card cover

## Multimedia Applications


- USB Playback Audio: AAC, M4A, MP3, WMA
- USB Playback Picture: BMP, JPEG, JPG, PNG
- USB Playback Video: ASF, AVI, DAT, FLV, MKV, MP4, MPEG, MPG, TS, VOB, WEBM, WMV

## Miscellaneous

- On-Screen Display Languages: English, French, German, Spanish, Polish, Turkish, Russian, Italian, Simplified Chinese, Traditional Chinese, Arabic, Japanese, Danish, Dutch, Finnish, Norwegian, Portuguese, Swedish
- Regulatory approvals: CE, FCC, Class B, UL/cUL, C-Tick, RoHS, GOST, BSMI, CB
- Warranty: 3 year warranty

## Internal Player

- CPU: Dual-Core Cortex-A72 @2GHz, Quad-Core Cortex-A53 @ 1.5GHz
- GPU: ARM Mali-T864
- Memory: 4GB DDR3
- Storage: 64G eMMC
- Wifi: 2T2R, 802.11 ac/a/b/g/n, WCT07R2201

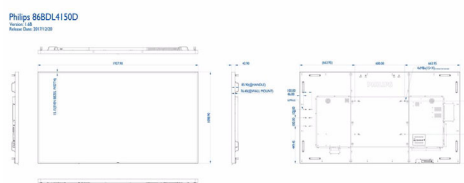

Issue date 2019-11-26

Version: 5.2.1

12 NC: 8670 001 51777  
EAN: 87 12581 75013 8

© 2019 Koninklijke Philips N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips N.V.  
or their respective owners.

[www.philips.com](http://www.philips.com)